


Ref. **1007**

BROCA MANGO REBAJADO HSS. SERIE CORTA

HSS Reduced Shank Drill Bit. Jobber Series
Foret Queue Reduite HSS. Serie Courte



HSS	DIN 338 N	118°						Blue Finish	Rectificado Ground Taillé Meulé		Tol. D h8
-----	-----------	------	--	--	--	--	--	-------------	------------------------------------	--	-----------

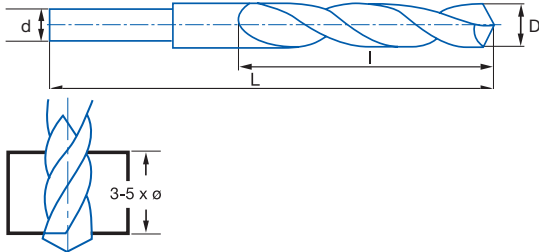

Material		Vc	Avances mm/rev. Feed / Pas			
Grupo	Sub.	HSS	Ø 12	Ø 16	Ø 20	Ø 25
1	1.1	25-30	0,160	0,180	0,250	0,430
	3.1	30-35	0,250	0,300	0,360	0,360
3	3.2	25-30	0,200	0,240	0,280	0,340
	6.1	60-80	0,320	0,380	0,450	0,540
6	6.2	60-80	0,320	0,380	0,450	0,540
	6.3	40-50	0,250	0,300	0,360	0,430

Vc= m/min.

r.p.m. = $\frac{Vc \times 1.000}{\pi \times \phi}$

D mm	d mm	L mm	l mm		N° Art. HSS	€
10,50	10,00	133	87	1	15976	7,08
11,00	10,00	142	94	1	15977	8,00
11,50	10,00	142	94	1	15978	8,46
12,00	10,00	151	101	1	15979	9,23
12,50	10,00	151	101	1	15980	10,01
13,00	10,00	151	101	1	15981	10,29
13,50	12,70	160	108	1	15982	13,91
14,00	12,70	160	108	1	15984	14,77
14,50	12,70	169	114	1	15985	15,78
15,00	12,70	169	114	1	15987	15,94
15,50	12,70	178	120	1	15988	18,38
16,00	12,70	178	120	1	15989	19,06
16,50	12,70	184	125	1	15990	21,38
17,00	12,70	184	125	1	15991	21,38

D mm	d mm	L mm	l mm		N° Art. HSS	€
17,50	12,70	191	130	1	15992	24,32
18,00	12,70	191	130	1	15993	25,61
18,50	12,70	198	135	1	15994	28,25
19,00	12,70	198	135	1	15995	28,25
19,50	12,70	205	140	1	15996	30,79
20,00	12,70	205	140	1	15997	35,47
20,50	12,70	205	145	1	66932	37,52
21,00	12,70	205	145	1	17071	37,52
21,50	12,70	210	150	1	66933	41,38
22,00	12,70	210	150	1	17072	41,38
22,50	12,70	210	150	1	66934	45,27
23,00	12,70	210	150	1	36364	45,27
23,50	12,70	220	160	1	66935	49,95
24,00	12,70	220	160	1	36365	49,95
24,50	12,70	220	160	1	66936	54,46
25,00	12,70	220	160	1	36366	54,46